


ROHRLEITUNGSKUPPLUNG

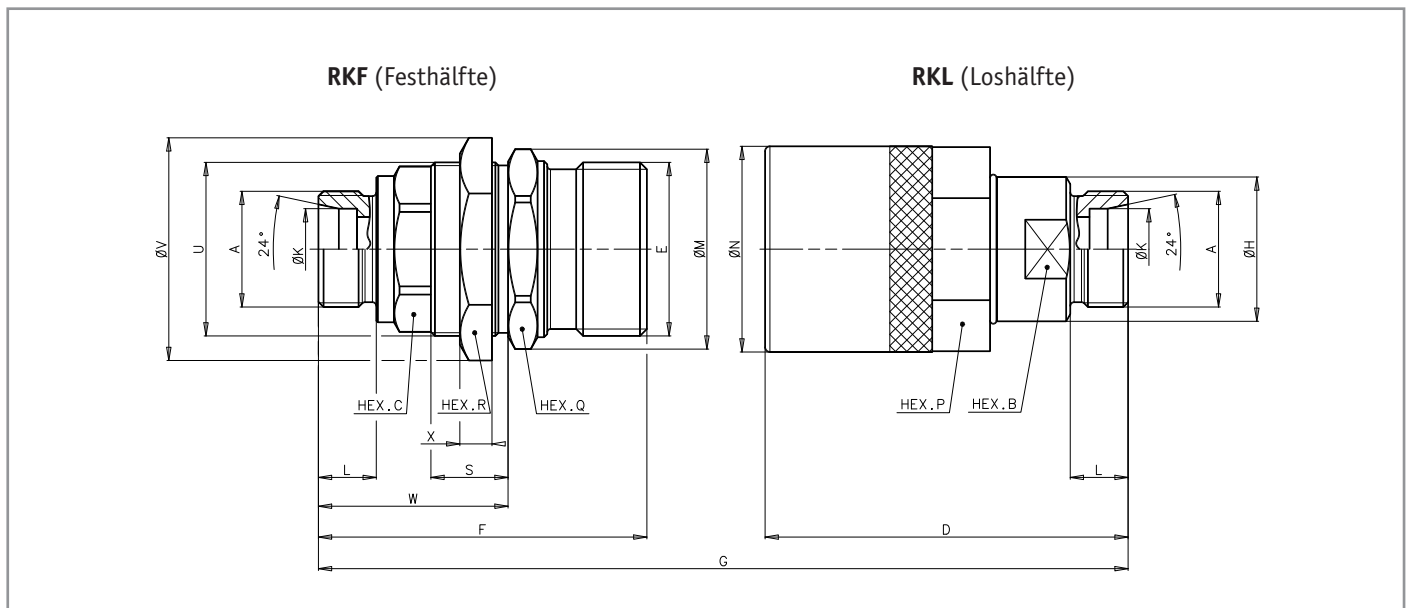

Außengewinde DIN 3861 - Schwere Reihe CES -

BG	max. Betr.druck (bar) gekuppelt	A Gewinde	Rohranschluss	HEX B	HEX Q	D	N* ø	F	U ø	E ø	L	HEX R	Bestell-Nr.	
													RK-Loshälfte	RK-Festhälfte
2	400	M 18x1,5	10 S	22	36	62	39	61	M 30x1,0	M 32x3,0	12	36	8233 G	8230 D
2	400	M 20x1,5	12 S	22	36	62	39	61	M 30x1,0	M 32x3,0	12	36	8231 A	8231
2	400	M 22x1,5	14 S	22	36	64	39	63	M 30x1,0	M 32x3,0	14	36	8236	8235
3	300	M 24x1,5	16 S	24	41	73	54	71	M 36x1,0	M 36x3,0	14	41	8240	8239
4	350	M 24x1,5	16 S	32	55	79	59	90	M 45x1,5	M 48x3,0	14	55	8239 A VR	8240 A VR
4	350	M 30x2,0	20 S	32	55	85	59	90	M 45x1,5	M 48x3,0	16	55	8239 C VR	8240 C VR
6	300	M 30x2,0	20 S	41	55	111	64	100	M 54x1,5	M 54x4,0	16	60	8241 A	8242 C
6	300	M 36x2,0	25 S	41	55	113	64	102	M 54x1,5	M 54x4,0	18	60	8241	8242
6	300	M 42x2,0	30 S	41	55	115	64	104	M 54x1,5	M 54x4,0	20	60	8243 A	8243
8	420	M 52x2,0	38 S	55	85	136	90	129	M 80x2,0	M 79x4,0	22	91	8249	8248

* Maß ØN stellt den größtmöglichen Durchmesser der Überwurfhülse dar.
Maßabweichungen ggf. herstellerbedingt möglich.